

CRR Series Reed Relays

- **Features:** Ultra miniature SMD relay for High Density Assembly, High Insulation Resistance up to 10 TOhm
- **Ceramic/Thermoset Molded Package, Supplied in Tape & Reel, UL listed, BGA option**
- **Applications:** Test and Measurement Systems, Telecommunications, Medical applications, Multiplexers



Part Description: CRR00-0AS (250)

Nominal Voltage	Contact Qty & Form	Options	Packaging Tape & Reel
03, 05	1A	Empty = Non-BGA S = BGA (Ball Grid Array)	empty (standard) = 1000 pcs 250 (optional) = 250 pcs

Customer Options	Switch Model	Unit
Contact Data	80 (A Dry)	
Contact Material	Rhodium	
Rated Power (max.) Any DC combination of V&A not to exceed their individual max.'s	10	W
Switching Voltage (max.) DC or peak AC	170	V
Switching Current (max.) DC or peak AC	0.5	A
Carry Current (max.) DC or peak AC	0.5	A
Contact Resistance (max.) @ 0.5V & 10mA	200	mOhm
Breakdown Voltage (min.) According to EN60255-5	0.21	kVDC
Operating Time (max.) Including Bounce, Measured w/40% Pull-In Overdrive	0.6	ms
Release Time (max.) Measured without Coil Suppression	0.1	ms
Insulation Resistance (typ.) Rh<45%, 100V Test Voltage	10 ⁹	Ohm
Capacitance (typ.) @ 10kHz across open Switch	0.2	pF

CRR Series Reed Relays

Coil Data (at 20°C)		Coil Voltage (VDC)		Coil Resistance (Ohm)	Pull-In Voltage (VDC)	Drop-Out Voltage (VDC)	Coil Power (mW)
Contact Form	Switch Model	Nominal	Max.	Typical (± 10 %)	Max.	Min.	Nominal
1A	80	3	5.0	70	2.25	0.45	129
		5	7.5	150	3.75	0.75	167

The Pull-In, Drop-Out Voltage and Coil Resistance will change at rate of 0.4% per °K


Relay Data (at 20°C)	Unit	
Contact Bulk Resistance (typ./max.) Through all plated material on substrate	260 / 440	mOhm
Dielectric Strength Coil/Contact (min.) According to IEC 60255-27	1.5	kVDC
Insulation Resistance Coil/Contact (typ./min.) Rh<45%, 200V Test Voltage	10 ¹² / 10 ¹³	Ohm
Capacitance Coil/Contact (typ./max.) @ 10 kHz with Closed Switch	0.9 / 1.1	pF
Shock Resistance (max.) 1/2 sine wave duration 11ms	50	g
Vibration Resistance (max.) 10 – 2,000 Hz	20	g
Operating Temperature (max.) Surrounding of the relay's housing	-40 to 125	°C
Storage Temperature (max.) Surrounding of the relay's housing	-55 to 125	°C
Soldering Temperature (max.) 5 seconds max.	255	°C
Washability Aqueous rinsing suitable. Proper drying necessary.	Fully Sealed	

Handling & Assembly Instructions


- Switching inductive and/or capacitive loads create voltage and/or current peaks, which may damage the relay. Protective circuits need to be used - see our website.
- External magnetic fields and magnetic effects, due to adjacent relays in high density matrices that may influence the relays' electrical characteristics, must be taken into consideration.
- Mechanical shock impacts, e.g. dropping the relays, may cause immediate or post-installation failure.
- Suppressing coil diode can have a negative influence on total number of switching cycles
- Reflow soldering: See the page 4. Recommendations given by the soldering paste manufacturer need to be considered as well as the temperature limits of other components/processes.

Reed Relay Dimensions (in mm [inch])

Tolerances acc. to ISO 2768-m

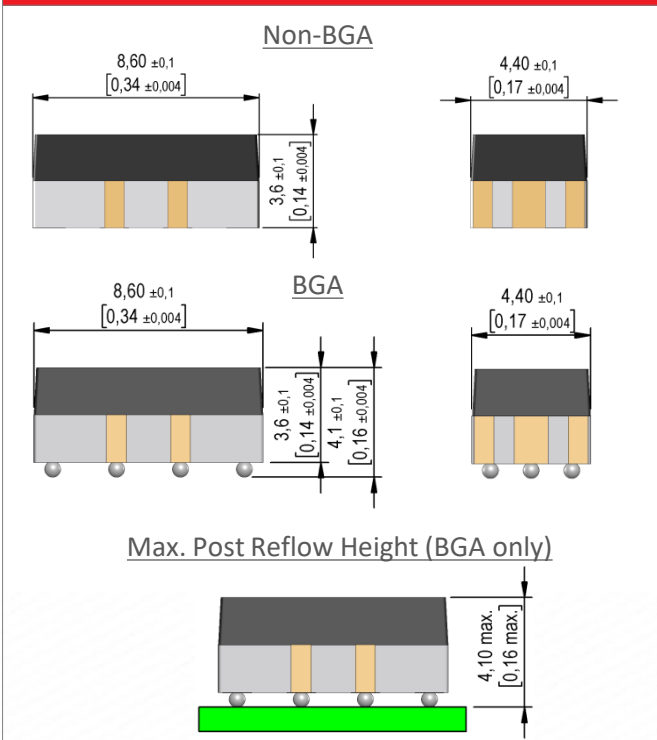



Life Test Data (*Load increase reduces life expectancy of Reed Switches)

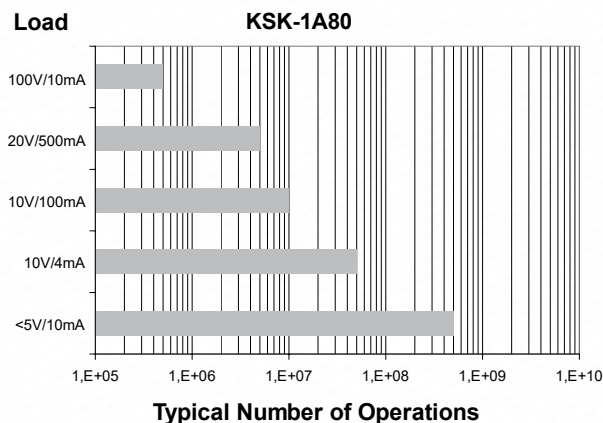

CRR Series Reed Relays


Marking Example Top View

CRR05-1A
Non-BGA

CRR05-1AS
BGA


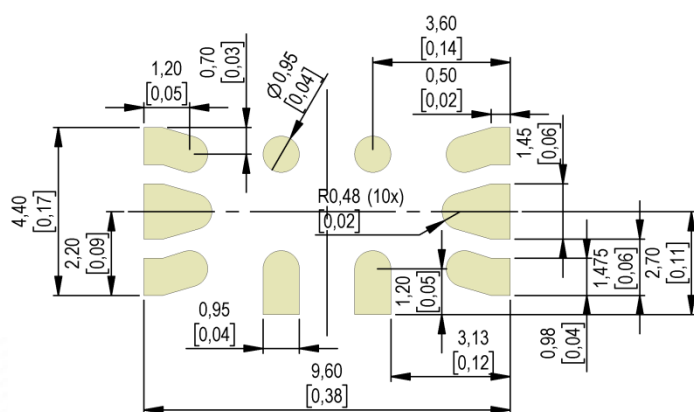
Date Code acc. to EN60062

Pin-Out (Top View)

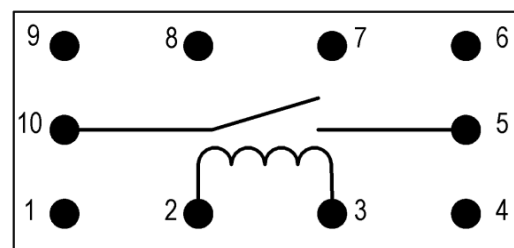


Non-BGA CRR00-1A

Recommended PCB Pad Layout Top View (in mm [inch]) Tolerances acc. to ISO 2768-m




BGA Solder Balls CRR00-1AS

Recommended PCB Pad Layout Top View (in mm [inch]) Tolerances acc. to ISO 2768-m

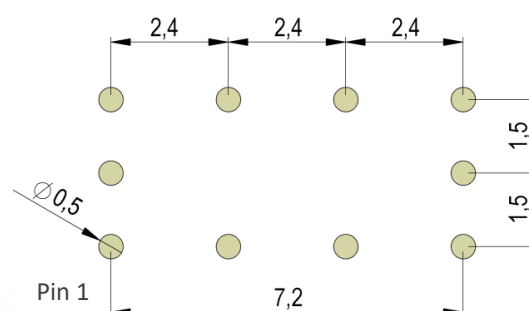

Glossary Contact Form

Form A	NO = Normally Open Contacts SPST = Single Pole Single Throw	
Form B	NC = Normally Closed Contacts SPST = Single Pole Single Throw	
Form C	Changeover SPDT = Single Pole Double Throw	


Glossary Option

CRR Basic	with Magnetic Shield, without Diode
L	Standard
D	with Diode
M	with Magnetic Shield, without Diode
Q	with Diode and Magnetic Shield
HR	High Resistance Coil
CRF Relays are available only with "Basic" Option	


CRR Series Reed Relays

Recommended Reflow Lead-free Profile (acc. to JEDEC J-STD 020D.1)

For usage with tin Sn96.5/Ag3/Cu0.5

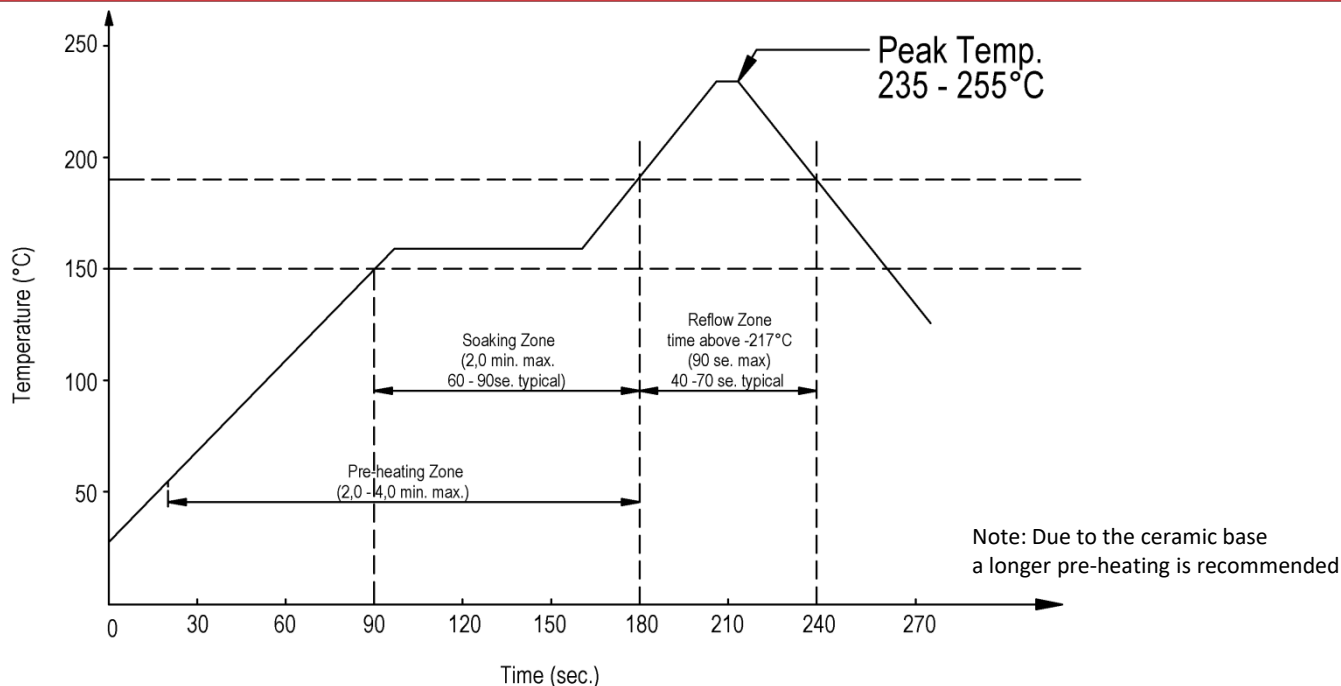

Relay Packaging Orientation (Tape&Reel per 1000 pcs. or 250 pcs.)

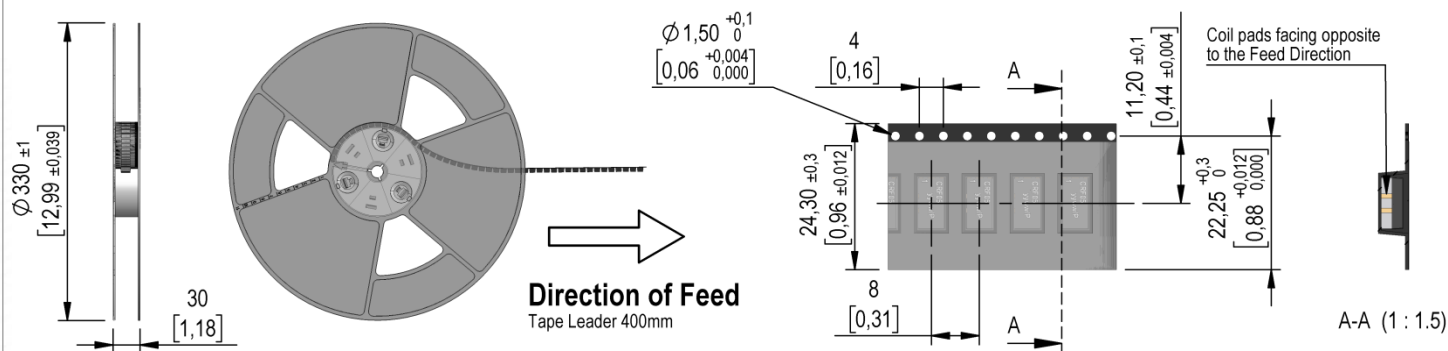

Please note: All technical specifications on this series datasheet refer to the standard product range. Modifications in the sense of technical progress are reserved. For general information only. For more specific information, please consult the product datasheet, available upon request.

This series datasheet could contain technical inaccuracies or typographical errors. Changes are periodically made to the information herein. These change will be incorporated in future revisions.

For deviating values, most current specifications and products please contact your nearest sales office.